

AURORA AFX[®] LAYOUT SHEET

MEGALOOP THRILLER™


No. 5510

YOUR SET CONTAINS:

- | QTY. | ITEM |
|------|----------------------|
| 1 | 15" Terminal Track |
| 4 | 15" Straight Track |
| 6 | 9" Straight Track |
| 1 | 6" Straight Track |
| 12 | 9" (1/4) Curve Track |
| 12 | 1/2 Loop Track |
| 5 | Low Bridge Support |
| 3 | High Bridge Support |
| 2 | 2-Pc. Loop Cradle |
| 1 | Loop Clamp |
| 12 | Guard Rail |
| 1 | 22-Volt Power Pack |
| 2 | Controller |
| 1 | Firebird 300 ZX |
| 1 | Track Cleaning Pad |
| 1 | 2 Pickup Shoes |
| 1 | 2 Springs |

Also included: Track Cleaning Pad, 2 Pickup Shoes, 2 Springs

MEGALOOP THRILLER™

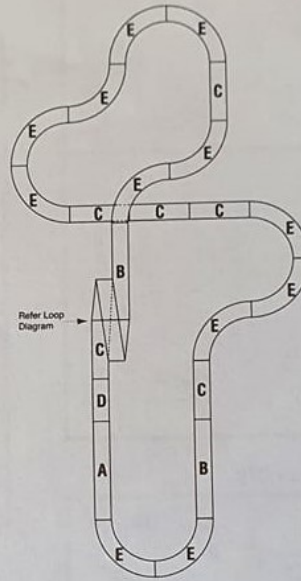


ALTERNATE TRACK LAYOUTS



See reverse for assembly of Wall-Riding Track Loop and Megaloop

THUNDERLOOP THRILLER™ DOGLEG



THUNDERLOOP THRILLER™ SPIRAL

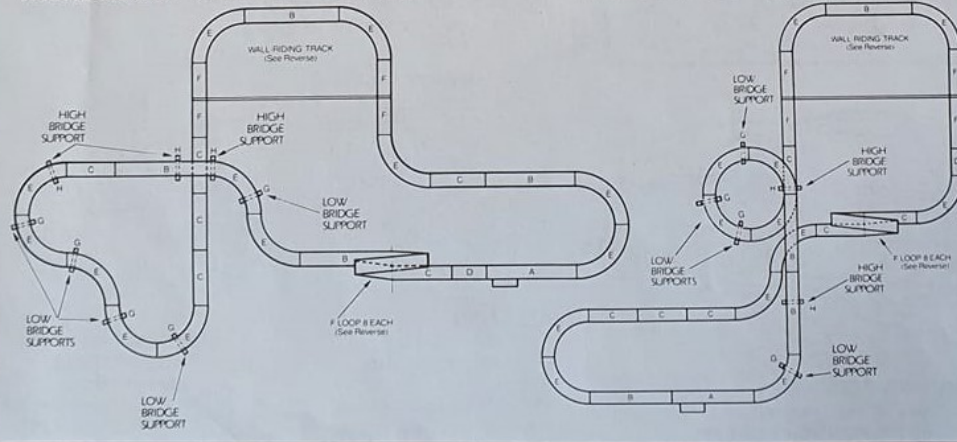

Wall-Riding Track and Loop Assembly

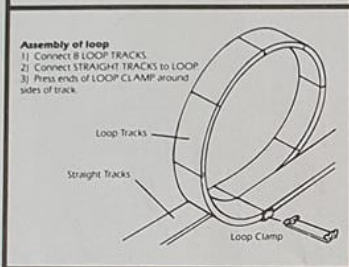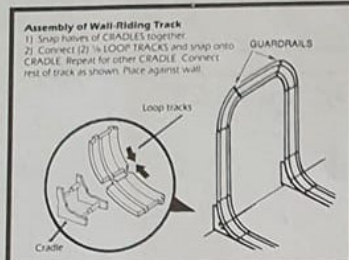


Megaloop Assembly

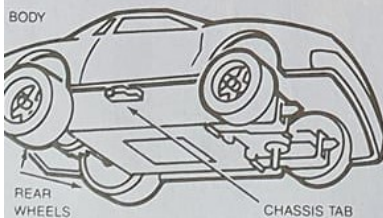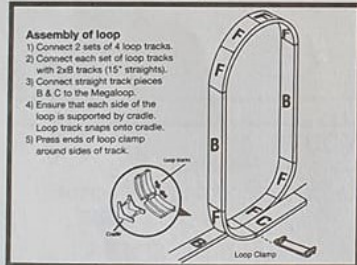

A. REMOVING BODY

1. Hold Rear Wheels. Pull out on one side of Body until it clears the Chassis Tab, then remove Body.

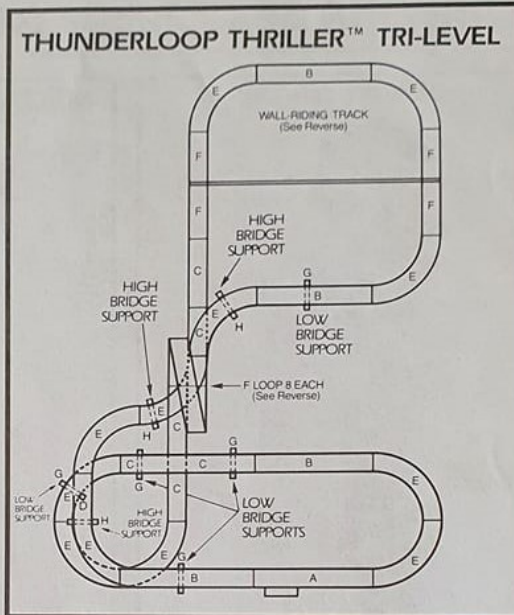



ATTENTION

For Aurora® AFX® Racing Cars!!!

IMPORTANT: Be careful when you handle the cars. Pressing the pick-up shoes may cause them and the small springs inside to fall off. See the steps below to reassemble the shoes and springs.

If you lose the pick-up shoes or springs, replace them with the extras included in the set.

BOTTOM OF CHASSIS

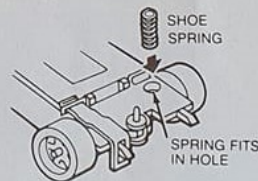

B. REPLACING PICK-UP SHOES

1. Carefully pull Pick-Up Shoe forward.
2. Lift up Shoe and remove.
3. Replace with new Shoes from Tune-Up Kit.

C. REPLACING SHOE SPRINGS

1. After removing Pick-Up Shoes (see "REPLACING PICK-UP SHOES" above), replace Springs as shown.